


Model AGT-S2

Washdown Checkweigher



Model	1.5	3	6 / 7.5	15	30
Max. capacity (kg)	1.5	3	6 / 7.5	15	30
Mini. Capacity (g)	10	20	40	100	200
Verification	0.5	1	2	5	10
Actual interval (g)	0.5/0.2/0.1/0.0	1/0.5/0.2/0.	2/1/0.5/0.	5/2/1/0.5	10/5/2/
Max. tare (kg)	1.5	3	6 / 7.5	15	30

- **Accuracy-** ± 2 divisions at full load
- **Construction-** Stainless steel and ABS plastic washdown enclosure
- **Power-** Built in rechargeable battery
- **Display-** 6 digit, 13mm high 7-segment bright red LED display, LED annunciators for zero, tare, pcs, lb/oz, kg, g, over, accept and under. LED battery level indicators
- **Features-** Selectable enhanced precision Tare, parts counting , checkweighing

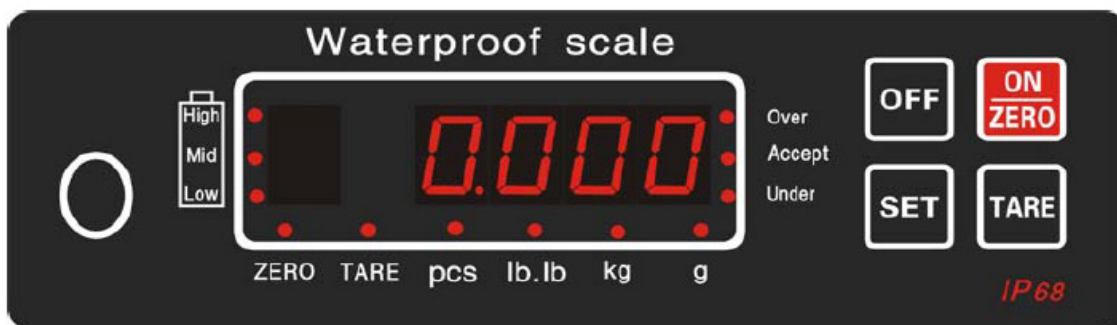

IP68 Washdown Checkweigher

Model AGT-S2 Washdown Checkweigher

Features

The AGT-S2 is a washdown checkweigher for the rapid indication of weight and over, under and accept tolerances in a washdown environment

Totally portable the AGT-S2 has an internal rechargeable battery which gives approximately 20 hours of usage between charges, or can be operated from main power supply.

Available in 1.5kg, 3kg, 6kg, 7.5kg, 15kg and 30kg with a resolution of 1 part in 6000 the AGT-S2 is an accurate scale designed to work in harsh, wet environments such as portion control, food processing, meat preparation areas, catering kitchens etc.

Washable and corrosion free, the AGT-S2 has a 223mm x 186mm stainless steel platform and a bright red 13mm high digits display.

Simple to operate, the keyboard has four buttons: on/zero, off, tare and function key to access the checkweigher functions, count mode, unit switching (metric - imperial), and enhanced resolution.

The scale has an auto-off feature, which can be disabled, to switch off the scale after 10 mins of inactivity. It has switchable audible buzzer which sounds in the accept range. A battery charge indicator is built into the display giving an instant check on the battery status and displays battery low when charging is required



Specifications

● Capacity-

1.5 kg x 0.5 g	7.5 kg x 2.0 g
3.0 kg x 1.0 g	15 kg x 5.0 g
6.0 kg x 2.0 g	30 kg x 10.0g

● Tare- Fully subtractive semi-automatic

● **Display-** Sealed watertight 7-segment, 6 digit 13mm high bright red LED; annunciator LED's for zero, tare, pcs, lb.oz (or oz), kg, g, over, accept and under. Rear facing customer display is the same.

● **Keyboard-** On/Zero, off, tare and set. Set gives access to checkweighing, counting and units (kg/g)

● **Functions-** Counting, units switching, checkweighing with selectable audible alarm, enhanced resolution (not for trade approval), auto-off after 10 minutes of inactivity

● **Power-** Internally mounted main AC adaptor and internal rechargeable battery

● **Battery Life-** Approximately 20 hours (charge time about 12 hours)

● **Operating Temp-** -10°C to + 40°C

● Scale Dimensions-

290mm (L) x 240mm (W) x 110 (H)

● **Weight -** Approx 4 kg (shipping: 4.5kg)

● **Class-** Class III automatic weighing instrument (for verification/trade approval)



AVERY NIGERIA LIMITED

5, Obasa Road, off Oba Akran Avenue, Ikeja, Lagos, Nigeria. Tel: +234 (0)8034705951, 07059164748.
E-mail: sales@averynigeria.com & service@averynigeria.com. Web: www.averynigeria.com